

## Certificate of acceptance of a geosynthetic material

**Product:** Mirafi PET PET 200–50, PET 300–50, PET 400–50,  
PET 600–50, PET 800–50, PET 1000–50,  
PET 1200–50, PET 1400–50, PET 1600–50,  
PET 2000–50

**Expiry date:** 31/07/2026 **subject to the conditions of expiry of the certificate below**

### Certificate history

Certificate no.	Issue no.	Date	Issue history
6	1	21/03/17	First accepted for use
	2	23/11/2017	Grade 1000–100 added
	3	04/04/2019	Grade 2000–50 added
	4	31/07/2020	Resubmission accepted for use
	5	11/11/2020	Updated expiry date for Geofabrics NZ Ltd QMS certificate
	6	04/10/2021	Updated ISO certificate for China manufacturing plant
	7	14/08/2023	Renewal accepted for use
	8	08/03/2023	Updated contact details of manufacturer

### Manufacturer

Tencate Industrial Zhuhai Co Ltd  
No. 601 South of Nangang West Road  
Gaolin Port Economic Zone  
Zhuhai 519050  
Guangdong  
China

Contact: Brendan Swifte  
Telephone: +60 3 5192 8568  
Email: [bswifte@solmax.com](mailto:bswifte@solmax.com)

### Supplier


Geofabrics NZ Ltd  
14 Goodman Place  
PO Box 12536  
Penrose  
Auckland 1642  
New Zealand

Contact: Gordon Stevens  
Telephone: +64 9 634 6495  
Email: [g.stevens@geofabrics.co.nz](mailto:g.stevens@geofabrics.co.nz)

### Product description

Mirafi PET high strength geotextiles are manufactured from high tenacity polyester (polyethylene terephthalate) fibres assembled to form a directionally structured and stable geotextile. No additional coating is applied.

## Product appearance

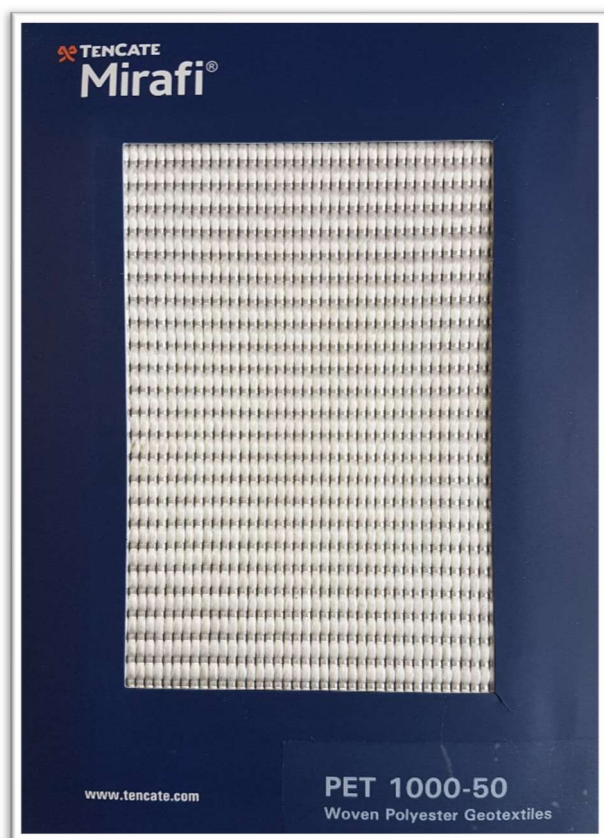

## Material properties

Refer to appended Mirafi PET geotextiles technical datasheet.

## Packaging

The manufacturer shall identify each roll of the product with the manufacturer's name and plant, product specification number, grade and batch identification, date code, and nominal dimensions. Labels shall be permanently fixed to each roll.

The manufacturer shall furnish complete written instructions for the storage, handling and installation of the product with the conditions of this warranty.

Product	Roll width [m]	Roll length [m]	Roll weight [kg]
PET 200-50	5	100	230
PET 300-50	5	100	320
PET 400-50	5	100	420
PET 600-50	5	100	590
PET 800-50	5	100	770
PET 1000-50	5	100	980
PET 1200-50	5	100	1180
PET 1400-50	5	100	1460
PET 1600-50	5	100	1640
PET 2000-50	5	50	3550

## **Joints, seams and connections**

No joints or seaming of Mirafi PET is permitted in the primary strength direction.

## **Basis and scope of acceptance**

Review of the Geofabrics Ltd submission for Mirafi PET high strength woven geotextile acceptance dated 31 July 2020 and additional information dated 14 August 2023.

## **Scope of acceptance**

The products above are accepted for use on Waka Kotahi projects within the defined scope of acceptance and any specific conditions of this certificate. Failure to abide by the certificate requirements may lead to the Waka Kotahi acceptance and the certificate becoming invalid.

This acceptance is issued in accordance with clause 6.8.1 of the 3<sup>rd</sup> Edition of the Waka Kotahi Bridge Manual and applies only to product sourced from the stated manufacturer.

This acceptance excludes any mechanically stabilised walls facing systems and connection between the facing system and the composite geotextile. Facing systems and connections, where applicable, shall be specifically designed on a project by project basis.

This acceptance relates to the Mirafi PET product only when used on Waka Kotahi projects for the specific use mentioned in the type of acceptance stated below. It does not remove the requirement for detailed design of the product.

## **Type of acceptance**

Accepted for specific use: Soil reinforcement

~~Accepted for provisional use~~

~~Not accepted / rejected~~

## **Product details supplied with the manufacturer/supplier's submission**

Refer to appended Mirafi PET geotextiles technical datasheet.

## **Specific Conditions of Use**

1. Users of the product are responsible for ensuring compliance with the certificate conditions. If a condition is not understood, guidance should be sought from Waka Kotahi.
2. The supplier shall provide product specifications and user manuals to purchasers / users of the product
3. The supplier shall notify Waka Kotahi within 20 working days of any deficiencies affecting the product quality, functionality and safety integrity (including corrective actions undertaken or proposed)
4. The supplier shall notify the Waka Kotahi within 20 working days of any intended change of the certified product including but not limited to:
  - a change of the product configuration (to the actual product or its application)
  - a variation to or addition of manufacturing locations or process
  - a change in the name or ownership of the manufacturing company.
5. Renewal of this certificate will be required if product specifications, product parameters, manufacturing standards or the manufacturer / supplier of the product change

6. Users receiving this product are responsible for ensuring that it is fit for purpose and that application of use complies with the scope from the Waka Kotahi acceptance
7. Anyone aware of any defect of the certified product (manufacture fault or any other defect) should notify the supplier immediately and Waka Kotahi in writing within 10 working days
8. Anyone becoming aware of a change to the product configuration (to the actual product or its application) and a variation to or addition of manufacturing locations or processes, should inform Waka Kotahi in writing within 10 working days
9. This acceptance is given for the specified product and its use as specified in the product configuration section of this certificate only
10. The product must be used / installed in accordance with the product installation specifications and relevant Waka Kotahi specifications. Where there is discrepancy between the product manual(s) and Waka Kotahi specifications and standards, the users must notify Waka Kotahi and seek resolution
11. Reference to this acceptance certificate should be given in project drawings and specifications.

### **Construction Quality Assurance Requirements**

Installers must ensure that they are familiar with relevant conditions, requirements and limitations of the product.

Verification of conformance of geosynthetics delivered to Waka Kotahi project sites with the manufacturer / supplier's specifications and the geosynthetic parameters advised by the manufacturer / supplier is the contractor's responsibility. Procedures specified in *ASTM D4759 Standard practice for determining the specification conformance of geosynthetics* can be used for this purpose.

The users shall review and verify submittals and sample information from the supplier. The users shall proceed with ordering the product only after the submittals have been reviewed.

The product delivered to the site shall be visually inspected by the users to check that the delivered product complies with the product description given in supplier's submittals and that labelling on the product confirms this. If changes in the product occur prior to the acceptance of the product by the user, the product shall be tested and evaluated with respect to the requirements of the contract documents. Product not meeting the requirements shall be removed from the site and replaced.

The manufacturer shall certify the quality of the rolls of the product. As a minimum, the manufacturer shall provide quality control certificates for each batch of product and each shift's production. These quality control certificates shall be signed by an officer of the manufacturer and provided to the user at least three weeks prior to the installation of the product.

The quality control certificate shall include:

- roll numbers and identification
- sampling procedures
- result of quality control tests, including a description of test methods used.

### **Expiry of Acceptance**

This acceptance expires on **31 July 2026** and replaces any previous acceptance.

The current ISO9001:2015 certification expires on **08 September 2024** for the China manufacturing plant and on **15 October 2026** for Geofabrics NZ Ltd. This acceptance expires for the respective plants for the product manufactured after the expiry date unless the respective certificates are renewed and provided to Waka Kotahi.

The accepted product must not be deployed on state highway projects after the expiry date of acceptance unless a further period of acceptance is granted or the product has been formally included in relevant Waka Kotahi specifications. Failure to submit a renewal as required will void the product from the Waka Kotahi accepted product list.

Should Waka Kotahi discover that information on material composition and properties (including test data), manufacturing and quality assurance procedures or any other material information supplied with the submission were flawed, or that in-service performance of the product reveals unacceptable problems, or that the product being supplied and / or marketed differs significantly from the product that was approved, it reserves the right, at any time, to modify or revoke its acceptance of the product.

**Authorised by the Lead Advisor Structures  
Transport Services  
New Zealand Transport Agency**